


FEATURES

- 5.8 – 8.0 GHz Operating Frequency Range
- 24.0dBm Output Power at 1dB Compression
- 18.0 dB Typical Small Signal Gain
- -40dBc OIMD3 @Each Tone Pout 14dBm

APPLICATIONS

- Point-to-point and point-to-multipoint radio
- Military Radar Systems

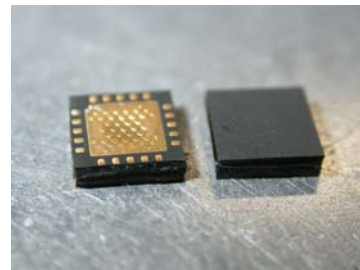

Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS ($T_b = 25\text{ }^\circ\text{C}$, 50 ohm, VDD=7V, IDQ=200mA)

SYMBOL	PARAMETER/TEST CONDITIONS	MIN	TYP	MAX	UNITS
F	Operating Frequency Range	5.8		8.0	GHz
P1dB	Output Power at 1dB Gain Compression	22.5	24.0		dBm
Gss	Small Signal Gain	15.0	18.0		dB
OIMD3	Output 3 rd Order Intermodulation Distortion @ $\Delta f=10\text{MHz}$, Each Tone Pout 14dBm, $V_{DS} = 7\text{V}$, $I_{DS} = 60\%$ to 70% Idss		-40	-37	dBc
Input RL	Input Return Loss		-10		dB
Output RL	Output Return Loss		-5		dB
Idss	Saturate Drain Current $V_{DS} = 3\text{V}$, $V_{GS} = 0\text{V}$	240	310	370	mA
VDD	Power Supply Voltage		7	8	V
Rth	Thermal Resistance		44		$^\circ\text{C/W}$
Tb	Operating Base Plate Temperature	-35		+85	$^\circ\text{C}$

MAXIMUM RATING ($T_b = 25\text{ }^\circ\text{C}$)


Symbol	Characteristic	ABSOLUTE ¹	OPERATING ²
V_{DS}	Drain-Source Voltage	8.5 V	8 V
V_{GS}	Gate-Source Voltage	-4 V	-3 V
I_{DD}	Drain Current	Idss	70% Idss
I_{Gsf}	Forward Gate Current	30 mA	4.5 mA
P_{IN}	Input Power	@ 3dB compression	@ 3dB compression
T_{CH}	Channel Temperature	175 $^\circ\text{C}$	150 $^\circ\text{C}$
T_{STG}	Storage Temperature	-65 $^\circ\text{C}$ to +175 $^\circ\text{C}$	-65 $^\circ\text{C}$ to +175 $^\circ\text{C}$
P_T	Total Power Dissipation	2.6 W	2.6 W

Note: 1. Exceeding any of the above ratings may result in permanent damage.
 2. Exceeding any of the above ratings may reduce MTTF below design goals.


Specifications are subject to change without notice.

CHIP OUTLINE AND PIN ASSIGNMENT

Top View

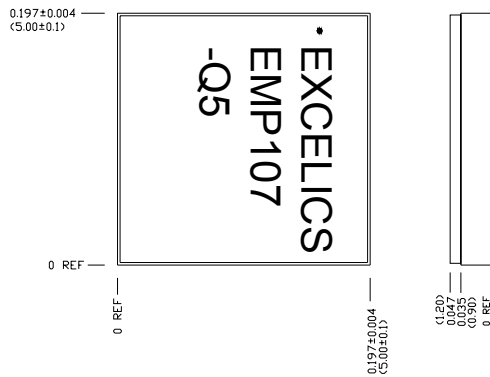


Bottom View

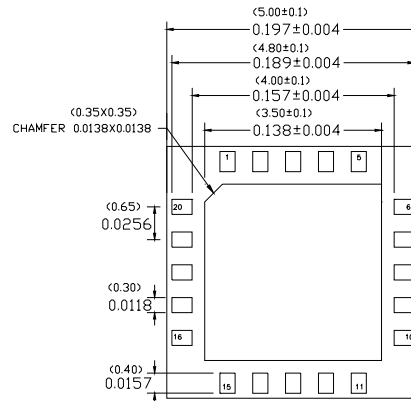

Additional Notes:

- 1) Ground Plane must be soldered to PCB RF ground
- 2) All dimensions are in inches (mm)
- 3) Refer to Excelics application notes on QFNs for further guidelines
- 4) Pin Assignment:

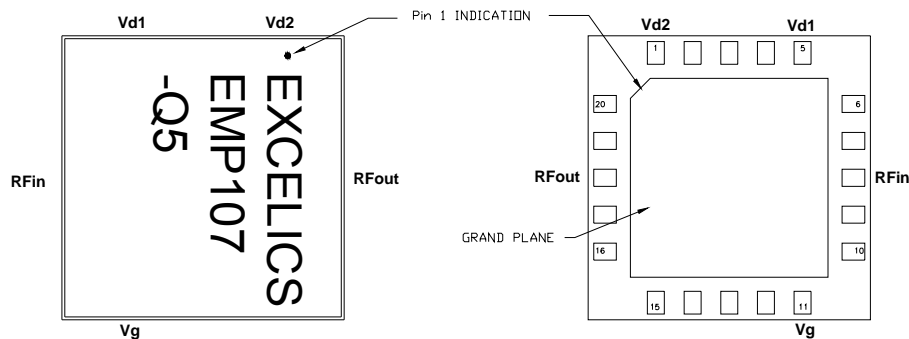


Pin	Assignment
2, 3, 4, 6, 7	NC
8	RF _{in}
11	V _g
9, 10, 12, 13, 14, 15	NC
18	RF _{out}
1	V _{d2}
16, 17, 19, 20	NC
5	V _{d1}


Specifications are subject to change without notice.

Typical Performance:

1. Small-Signal Parameters (@Vds = 7V, Ids = 200mA)

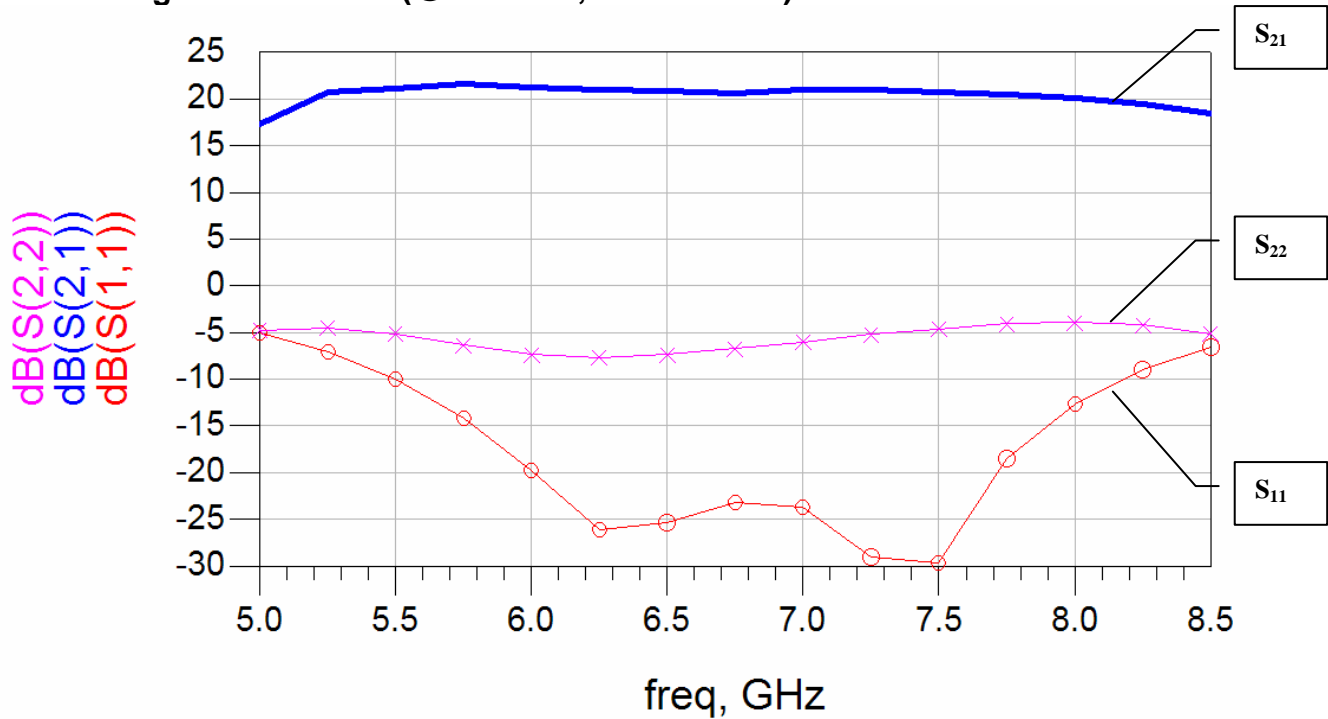


2. P1-dB & G1-dB (@Vds = 7V, Ids = 200mA)

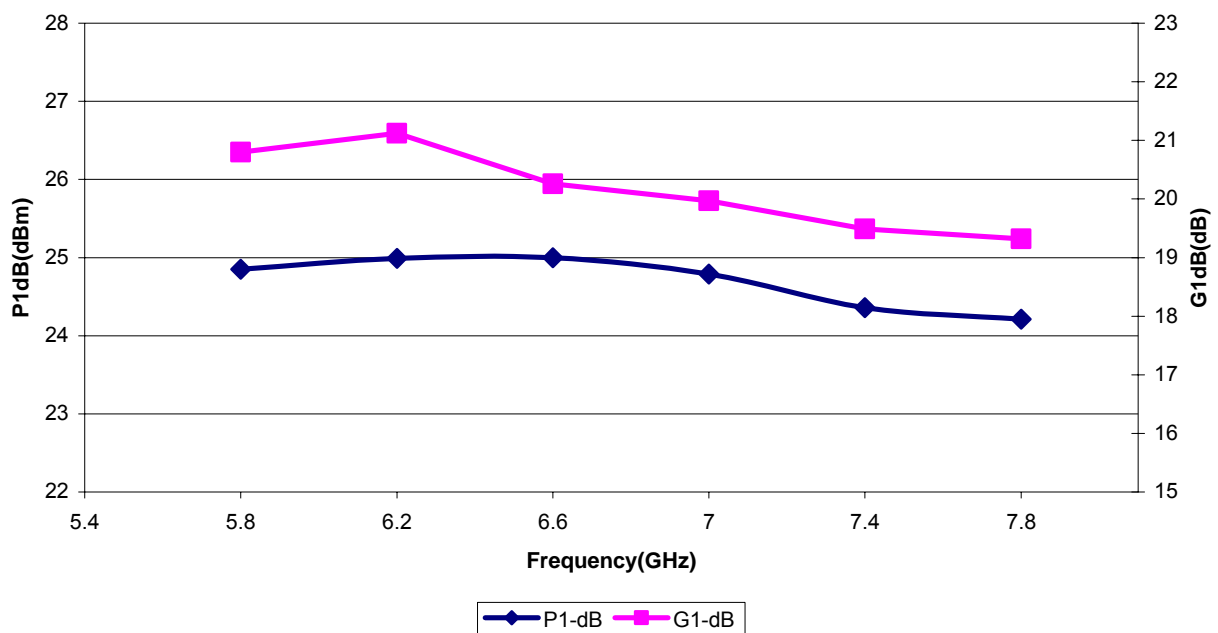

Specifications are subject to change without notice.

Recommended Circuit Schematic:

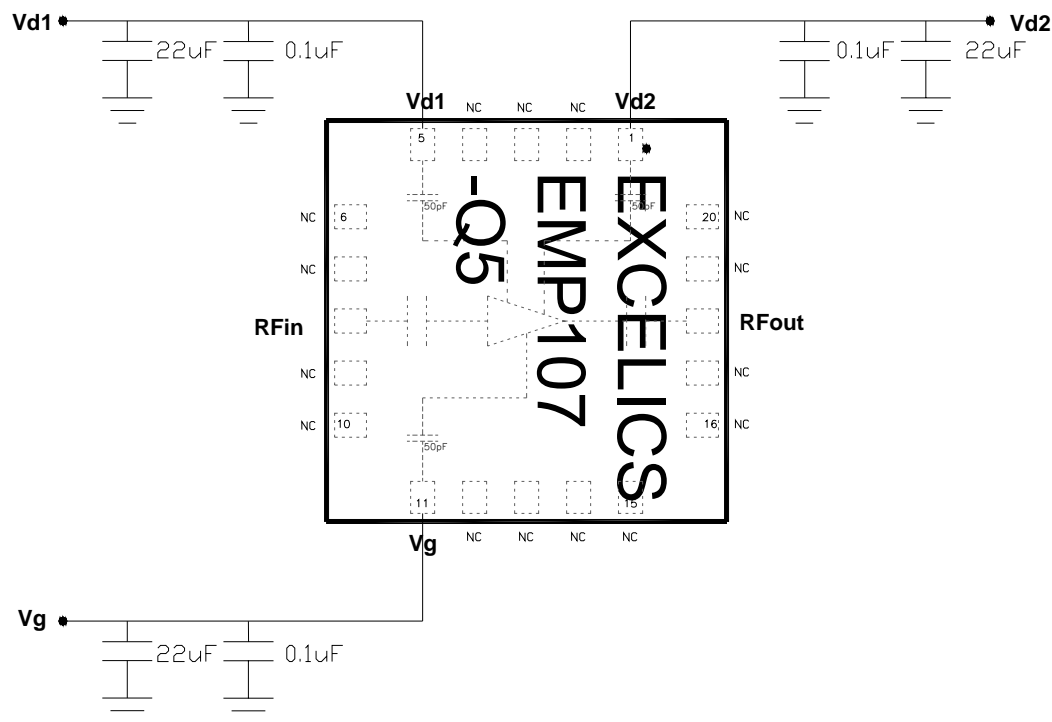

Notes:

- 1) External bypass capacitors should be placed as close to the package as possible.
- 2) Dual biasing sequence required:
 - a. Turn-on Sequence: Apply $V_g = -2.5V$, followed by V_{d1} and $V_{d2} = 7V$, lastly increase V_g until required I_{dq}
 - b. Turn-off Sequence: Turn off V_{d1} and V_{d2} , followed by V_g
- 3) Demonstration board available upon request.





EMP107-Q5

5.8 – 8.0 GHz Surface-Mounted PA

DISCLAIMER

EXCELICS SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. EXCELICS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

EXCELICS SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF EXCELICS SEMICONDUCTOR, INC.

AS HERE IN:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 5 of 5
Rev. 02