



PRELIMINARY

EIM5767-4

UPDATED 01/06/2009


5.725-6.725 GHz Multi-Stage Power Amplifier

FEATURES

- 5.725-6.725GHz Operating Frequency Range
- 35.5dBm Output Power at 1dB Compression
- 27.0 dB Typical Power Gain @1dB gain compression
- -45dBc Typical OIM3@ each tone Pout 22.5dBm
- Non-Hermetic Metal Flange Package

APPLICATIONS

- VSAT

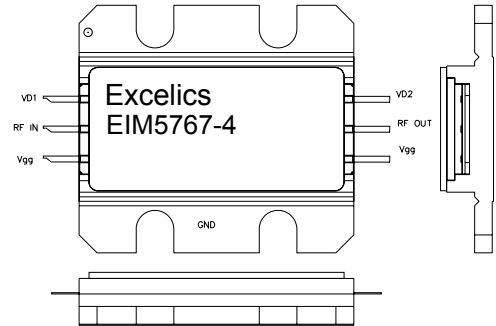

Caution! ESD sensitive device.

ELECTRICAL CHARACTERISTICS (Tb = 25 °C, 50 ohm, VD1=7V, VD2=10V, Vgg=-5V)

| SYMBOL | PARAMETER/TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------|---|-------|------|-------|-------|
| F | Operating Frequency Range | 5.725 | | 6.725 | GHz |
| P1dB | Output Power at 1dB Gain Compression | 34.5 | 35.5 | | dBm |
| G1dB | Gain @1dB gain compression | 24 | 27 | | dB |
| OIMD3 | Output 3 rd Order Intermodulation Distortion @Δf=10MHz, Each Tone Pout 22.5dBm | | -45 | -42 | dBc |
| Input RL | Input Return Loss | | -12 | -8 | dB |
| Output RL | Output Return Loss | | -15 | -10 | dB |
| VD1 | Drain Supply Voltage 1 | | 7 | | V |
| VD2 | Drain Supply Voltage 2 | | 10 | | V |
| I _{DQ1} | Quiescent Drain Current 1 | | 800 | | mA |
| I _{DQ2} | Quiescent Drain Current 2 | | 1100 | 1300 | mA |
| Vgg | Gate Supply Voltage | | -5 | | V |
| R _{th} | Thermal Resistance | | 4.2 | | °C/W |
| ΔT _{ch} | Channel Temperature Rise | | | 80 | °C |

Note: Turn on/off sequence is required: ---to turn on: apply -5V on both Vgg first, then +7V and +10V.
 ---to turn off: turn +7V and +10V off first, then turn -5V off

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
 Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 1 of 3
 Revised January 2009



EIM5767-4

UPDATED 01/06/2009


5.725-6.725 GHz Multi-Stage Power Amplifier

MAXIMUM RATINGS @25°C^{1,2}

| SYMBOL | CHARACTERISTIC | ABSOLUTE | CONTINUOUS ^{1,2} |
|------------------|-------------------------|-----------|---------------------------|
| V _{D1} | Drain Supply Voltage 1 | 12V | 8V |
| V _{D2} | Drain Supply Voltage 2 | 14V | 10V |
| V _{gg} | Gate Supply Voltage | -10V | -6 V |
| I _{gg} | Gate Current | 150mA | 50 mA |
| P _{IN} | Input Power | 20dBm | @ 3dB compression |
| T _{CH} | Channel Temperature | 175°C | 165°C |
| T _{STG} | Storage Temperature | -65/175°C | -65/175°C |
| P _T | Total Power Dissipation | 29.8W | 25W |

Notes: 1. Operating the device beyond any of the above rating may reduce MTTF and cause permanent damage.
 2. Bias conditions must also satisfy the following equation $V_{dd} \cdot I_{dd} < (T_{CH} - T_b) / R_{TH}$

Package Dimension and Pin Assignment

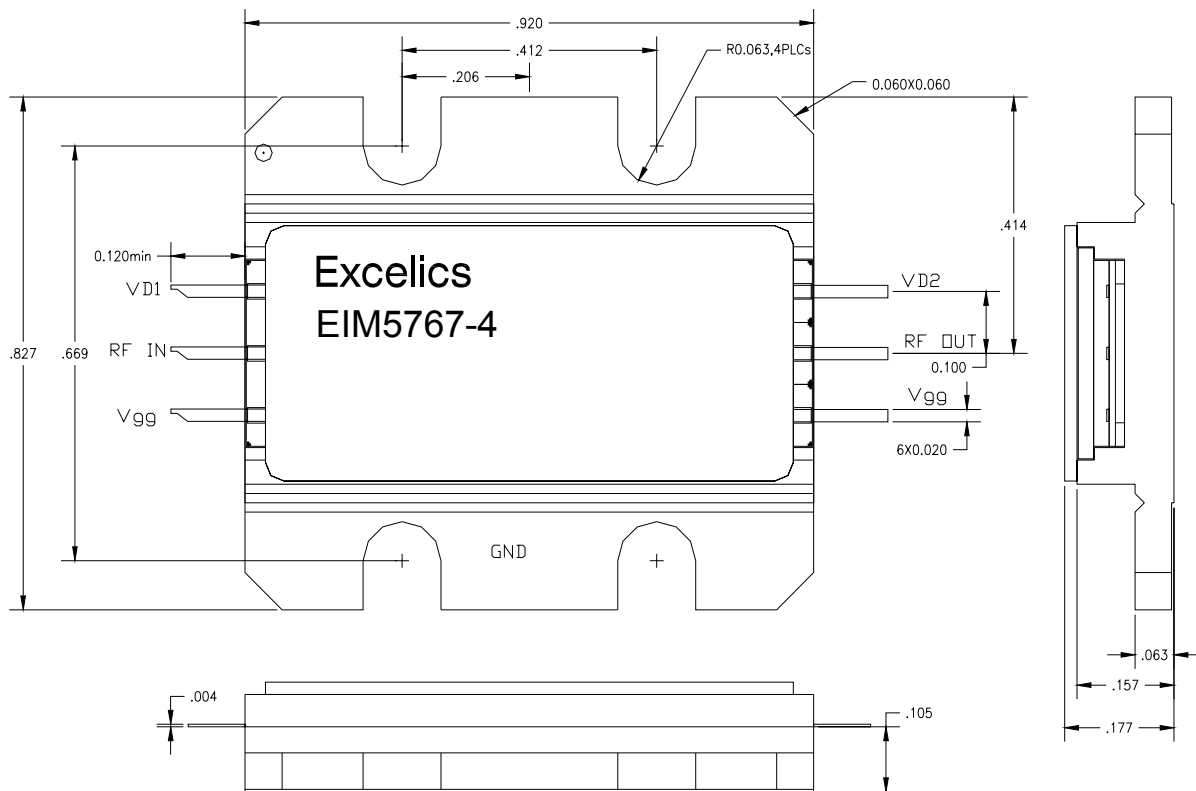

Dimensions are in inches

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
 Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 2 of 3
 Revised January 2009



EIM5767-4

UPDATED 01/06/2009

5.725-6.725 GHz Multi-Stage Power Amplifier

DISCLAIMER

EXCELICS SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. EXCELICS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

EXCELICS SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF EXCELICS SEMICONDUCTOR, INC.

AS HERE IN:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Specifications are subject to change without notice.

Excelics Semiconductor, Inc. 310 De Guigne Drive, Sunnyvale, CA 94085
Phone: 408-737-1711 Fax: 408-737-1868 Web: www.excelics.com

page 3 of 3
Revised January 2009